


Safeway Pallet Specification

New Merchandise Vendor Specification Effective December 30, 2012

- ❶ 48" x 40" GMA Class 1 wood pallet, unless otherwise specified
- ❶ Rental/re-use pallets – all must meet Safeway Pallet Specifications
- ❶ 48" x 40" notched stringer with two-way entry for pallet jacks and four-way entry for fork tines; flush non-reversible, multiple-use 3 stringer pallet
- ❶ Configuration
 - ❶ Top - minimum 7 boards nominal 4-inch boards or 6 nominal 6-inch boards
 - ❶ Bottom - minimum 5 boards nominal 4-inch
- ❶ Decking is minimum 5/8 (.625) in. and Stringers are minimum 1-1/4 (1.25) in.
- ❶ Clean, free of debris (including bug & rodent remnants), odor, stains and brand marks
- ❶ Constructed of mixed density hardwoods; all components must be securely fastened with all nails cleanly driven
- ❶ Metal plates are acceptable using NWPCA guidelines for pallet plating; no double runners or blocks on stringers
- ❶ Imported pallets must be heat treated or fumigated – ISPM 15 Labeling Required

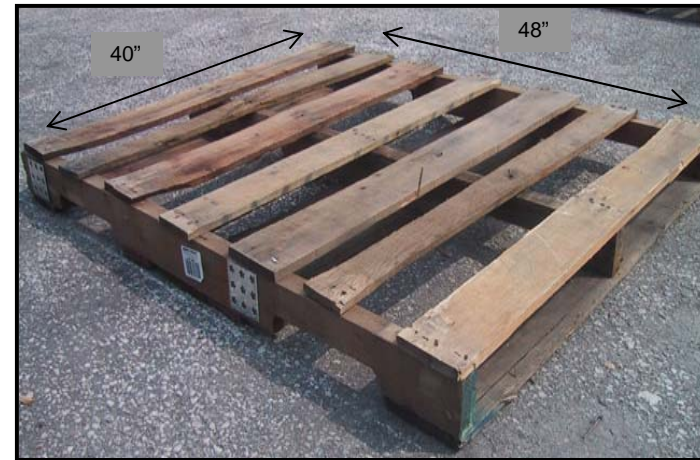

Picture of minimally accepted pallet

Shipments on pallets deemed to be unsafe will be refused. Vendor will be responsible for restacking and pallet charges